

Stainless steel




Series B20

Full bore check valve with female threaded connection.

Technical Features

Body:	Stainless steel 1.4408
Disc:	Stainless steel 1.4408
Spring:	Stainless steel ASTM A276 304
Seat:	FKM
Body seal:	PTFE
Temperature range:	-20...+150°C
Connection:	Female thread acc to ISO 228-1

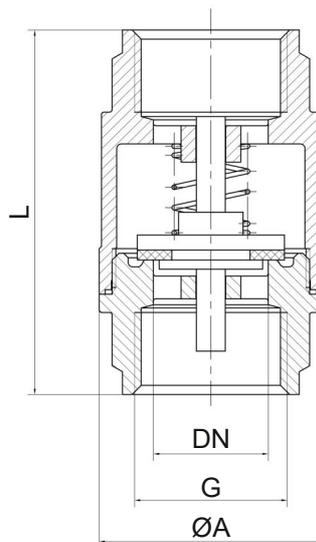

Dimensions

Type	G"	DN	ØA ±1,5	L ±1,5	PN	Kg
B20-3/8"	3/8	10	29	47	63	0,1
B20-1/2"	1/2	15	34	57	63	0,2
B20-3/4"	3/4	20	40	64	63	0,3
B20-1"	1	25	48	80	63	0,4
B20-1 1/4"	1 1/4	32	60	82	63	0,7
B20-1 1/2"	1 1/2	40	70	93	63	1,0
B20-2"	2	50	83	100	63	1,6